




1. Nm is recommended
2. InitgPty is same as Dbtr so PstlAdr must not be filled
3. InitgPty is same as Dbtr so Id must not be filled
4. InitgPty is same as Dbtr so CtryOfRes must not be filled
5. If InitgPty is different from Dbtr
 - ? Id is recommended



1. If Id is used
 - ? OrgId is mandatory
 - ? OrgId can have maximum of one sub-element.
 - ? PrtryId is recommended

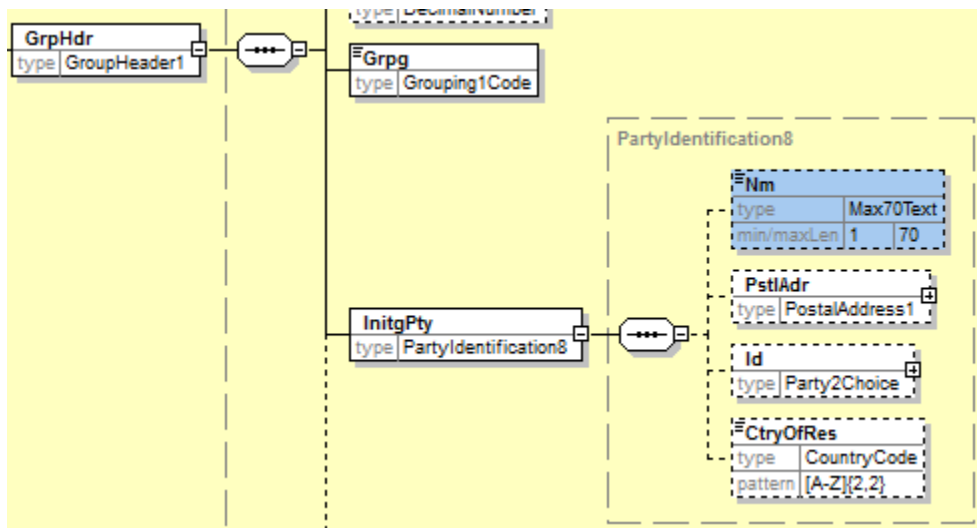